
LED Linear Luminary



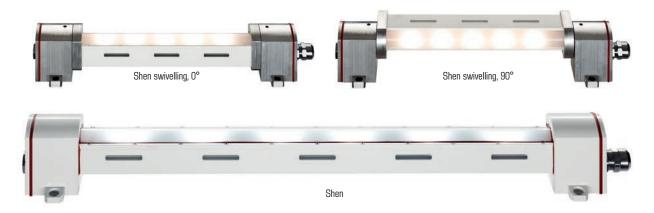

Technical Data

Name & No.	Watt	Description
Shen	24W	 IP 56 casing aluminium, cover made of polycarbonate, without ballast, directly 230V power supply voltage 6 pcs high power AC LED durability: up to 30.000 hours (manufacturer's data) depends on operating temperature lamp colour: warm white or cool white 230V (other voltage upon request) input power: 24W lighting current: ca. 1.200 lm, 3000K lighting current: ca. 1.600 lm, 6300K cable gland: M16x1,5 (IP 44) beam angle: 120° ambient temperatur: -40°C to +40°C optionally swivelling available optionally swivelling available optionally available with on/off switch Like other illuminants the highly efficient AC LEDs develop heat. Dose attaches great importance to the thermal management in lighting. The LED modules can operate under the critical temperature level and they can deliver their full perfomance throughout their whole durability. The fitting of the LED module directly on to the LED heatsink ensures an efficient dissipation of the LEDs thermal load. The design, construction and material of the case are also integrated in the thermal management, without any invalid warming.

Spare Parts on request

