


Reduction-Type Cable Glands of Brass

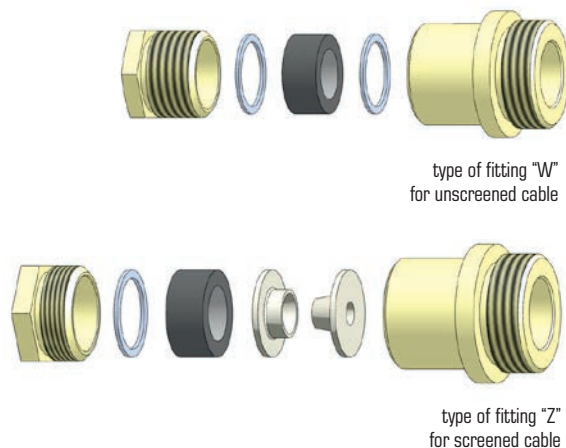

Hebriden

Technical Data

No. Outfit "Z"	No. Outfit "W"	Thread Inside mm	Thread Outside mm	Outfit	Sealing Ring Inner Ø mm DIN 89349	Washer Inner Ø mm DIN 89347	Nominal Size of Earthing Insert DIN 89345	For Cable Ø mm	Description
587 - Z../M 24	587 - W../M 24	M 18 x 1,5	M 24 x 1,5	Z 6 / W 6	18-06*	18-09	18-06	6 - 7,5	<ul style="list-style-type: none"> • brass reduction-type cable gland screw-in type with metric thread • flat locknuts see Tonga Locknuts • example for purchase order: 586 - Z 17 / M 30
587 - Z../M 30	587 - W../M 30		M 30 x 2	Z 8 / W 8	18-08	18-09	18-06	7 - 8,5	
				Z 10 / W 10	18-10	18-11	18-07	8 - 10,5	
586 - Z../M 30	586 - W../M 30	M 24 x 1,5	M 30 x 2	Z 8 A / W 8 A	24-08	24-09	24-06	7 - 8,5	
586 - Z../M 36	586 - W../M 36		M 36 x 2	Z 10 A / W 10 A	24-10	24-11	24-07	8 - 10,5	
				Z 12 / W 12	24-12	24-13	24-08	10 - 12,5	
				Z 14 / W 14	24-14	24-15	24-10	12 - 14,5	
				Z 16 / W 16	24-16	24-17	24-13	14 - 16,5	
				Z 17 / W 17	24-17	24-18	24-14	16 - 17,5	
585 - Z../M 36	585 - W../M 36	M 30 x 2	M 36 x 2	Z 15 / W 15	30-15*	30-19	30-16	14,5 - 16,5	
585 - Z../M 45	585 - W../M 45		M 45 x 2	Z 18 / W 18	30-18	30-19	30-16	16 - 18,5	
				Z 20 / W 20	30-20	30-21	30-18	18 - 20,5	
584 - Z../M 45	584 - W../M 45	M 36 x 2	M 45 x 2	Z 18 A / W 18 A	36-18*	36-18	36-20	16,5 - 18,5	
584 - Z../M 56	584 - W../M 56		M 56 x 2	Z 22 / W 22	36-22	36-23	36-20	20 - 22,5	
				Z 24 / W 24	36-24	36-25	36-22	22 - 24,5	
				Z 26 / W 26	36-26	36-27	36-24	24 - 26,5	
583 - Z../M 56	583 - W../M 56	M 45 x 2	M 56 x 2	Z 28 / W 28	45-28	45-29	45-27	26 - 28,5	
				Z 30 / W 30	45-30	45-31	45-30	28 - 30,5	
				Z 32 / W 32	45-32	45-33	45-30	30 - 32,5	
582 - Z../M 72	582 - W../M 72	M 56 x 2	M 72 x 2	Z 35 / W 35	56-35	56-36	56-35	32 - 35,5	
				Z 38 / W 38	56-38	56-39	56-39	35 - 38,5	
				Z 41 / W 41	56-41	56-42	56-36	38 - 41,5	

* Special size (similar to DIN 89349)

For an extra charge all cable glands are also available with chrome plated or nickel plated galvanic surface.