

HYLIA LED Submarine Light

TECHNICAL SPECIFICATION

Item Number	8121620
Type	HYLIA LED with camouflage light
Protection Class	IP 56 according to EN 60529
Application	Submarine lighting
Material	Aluminium housing, seawater resistant
Light Output	Approx. 1.300 lumen
Input Voltage	24V DC
Power	20 W
LED	2 x COB-Modul
Light Colour	3000K camouflage light: 540 nm (green)
Lifetime LED:	50.000 hrs. (manufacturer information) in continuous operation
Interface (optional)	CAN-BUS
Cable Gland	M18 x 1,5 brass chromium-plated according to VG 88773 and VG 88812
Weight	1,8 kg
Ambient Temperature	-35°C up to +70°C
Testing	Environment-, EMV- und schock examined according to VG



ADVANTAGES

Adjustable LED unit (rotatable) for indirect light etc.

LED unit with camouflage light in 540 nm (green) for the operations centre


Dimmable

Large heat sink for heat dissipation

Color Rendering Index (Ra) > 70

Low energy consumption

Electrical protection class III

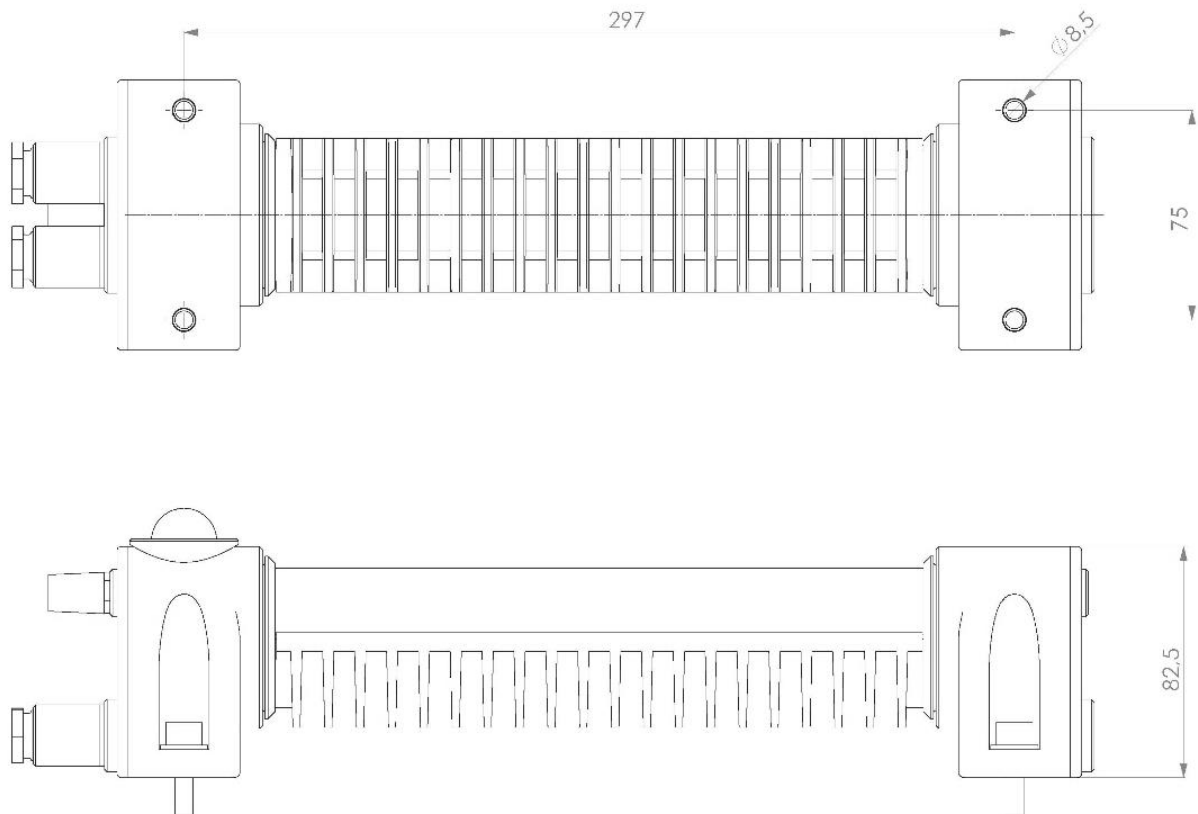

Karl Dose GmbH
Quality Products for your Safety