

Technical Datasheet

HERCULES M 4 LED



TECHNICAL DATA

Type:	Floodlight with 4 high power LED modules
Material:	Housing: seawater resistant aluminum; Brackets: stainless steel
Housing color:	All surfaces white powdercoated RAL 9016, other colors available on request
Cable glands:	M18x1.5, EMV, stainless steel
Weight:	11.7 kg $\pm 5\%$
Ambient temperature:	-40°C to +45 °C
IP protection class:	IP 66 and IP 67

ELECTRICAL DATA

Input voltage:	230 V AC 50/60 Hz, 115 V AC 50/60 Hz, 220 V DC
Power:	140 W

LIGHTING DATA

Color temperature:	5,700 K
Light current:	Aprox. 26,900 lm
Beam angle:	32°
Lifetime diode:	>50,000 hrs.



Date of issue: 07.08.2023
Doc.no.: DB-2HER-2
Rev no.: 01
Subject to changes

Headquarters in Hamburg
KARL DOSE GmbH
Försterweg 73-77
22525 Hamburg
Germany

Contact us:
Website: www.karl-dose.com
Phone: 0049 (0)40 547322-0
E-Mail: sales@karl-dose.de





Technical Datasheet

HERCULES M 4 LED



FIGURES

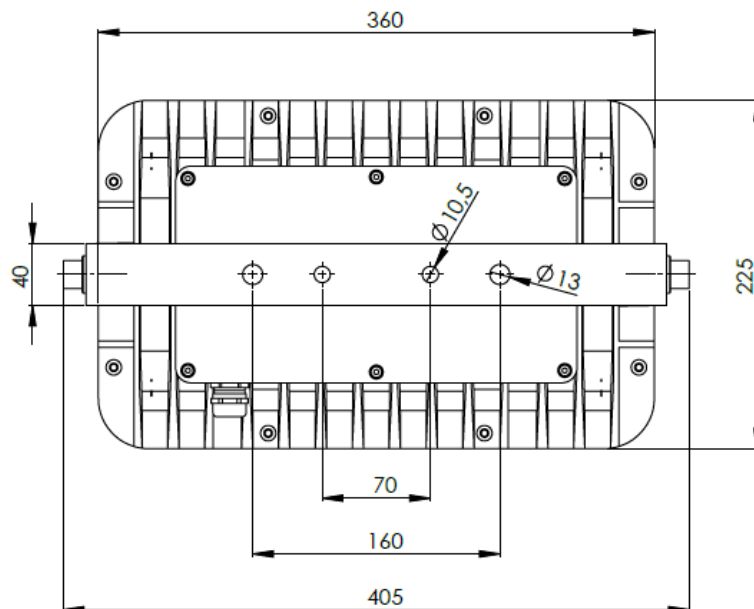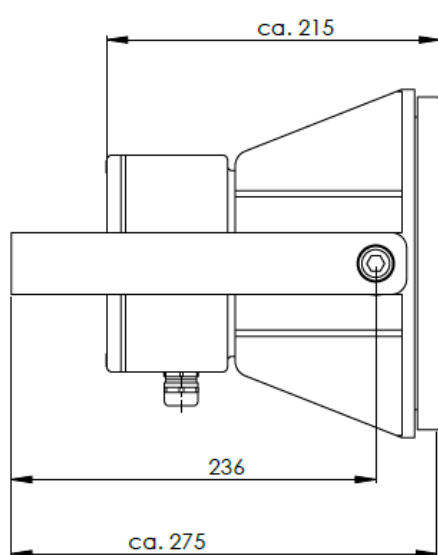

Date of issue: 07.08.2023
Doc.no.: DB-2HER-2
Rev no.: 01
Subject to changes

Headquarters in Hamburg
KARL DOSE GmbH
Försterweg 73-77
22525 Hamburg
Germany

Contact us:
Website: www.karl-dose.com
Phone: 0049 (0)40 547322-0
E-Mail: sales@karl-dose.de

